





ISTRUZIONI FISSAGGIO E CABLAGGIO STACCABATTERIA

Ref. EA/462


DATI CARATTERISTICI	TECHNISCHE MERKMALE
TECHNICAL SPECIFICATIONS	CARACTERISTIQUES
-Tensione nominale -Nominal voltage -Nennspannung -Tension nominale -Tensión nominal -Tensão nominal	-Temperatura di impiego -Operating temperature range -Betriebsstemperatur -Température d'emploi -Temperatura de funcionamiento -Temperatura operativa
12V e 24V 12V and 24V 12V und 24V 12V et 24V	-30°/+60°
-Corrente di funzionamento breve durata -Max short term current: (main contact) -Betriebsstrom bei Kurzbetrieb -Courant de fonctionnement de courte durée -Corriente de funcionamiento de corta duración -Corrente de funcionamento de breve duração	-Contatti -Contact -Kontakte -Contacts -Contactos -Contactos
1200A per 5 sec. 1200A for 5 sec. 1200A bei 5 Sek. 1200A pour 5 sec. 1200A por 5 sec 1200A por 5 sec	rame argentato silver-plated cooper versibertes Kupfer cuivre argenté plateado prata
- Corrente massima continua - Max continuous current (main contact) - Max. Betriebsstrom bei Dauerbetrieb - Courant maxime continu - Corriente máxima continua - Corrente máxima contínua	-Dimensioni contatti principali -Main contacts size -Kontakteabmessung -Dimension contacts principaux -Dimensiones de los contactos principales -Dimensões dos contactos principais
150 A	M10
- Corrente massima continua (contatto suppl.) - Max continuous current (auxiliary contacts) - Max. Dauerbetriebsstrom (bei Nebenkontakten) - Courant maxime continu (contact auxiliaire)	-Contatti ausiliari -Auxiliary contacts -Nebenkontakte -Contacts auxiliares -Contactos auxiliares -Contactos auxiliares
5 A	6.3 mm
-Grado di protezione IP -protection grade -Schutzgrad -Degré de protection -Grado de protección IP -Grau de protecção IP	
IP 54	




(1)



(2)




(3)





(4)

EA/462



(A)

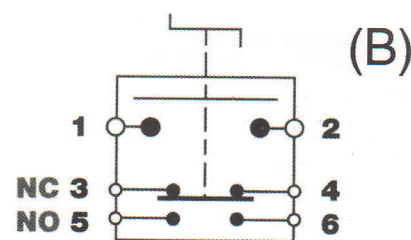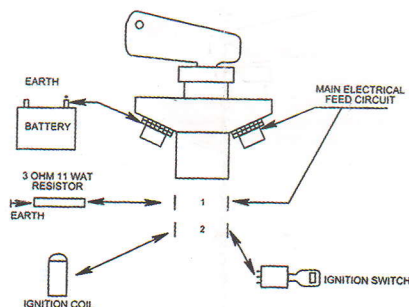

(B)