



**2012 Catalogue**  
**Seats Table**  
*Tabella Sedili*

The following measurements are given as a guide.  
Actual measurements may vary to accommodate production.  
Seat fitting type: according to FIA regulations the seat must be fixed to the brackets by means of at least four bolts M8 class 8.8.  
The diagram shows the distances between the fixing points in mm.

\* the weight refers to the complete seat (tolerance of 10%).

\*\* referring to bottom fixing points of the sliding guide.


**TYPE W:** inner side int. 289 mm **TYPE Y:** bottom 345x270 mm

Le misure riportate nella tabella sono fornite esclusivamente a titolo indicativo, potranno subire variazioni a seconda delle esigenze di lavorazione. Descrizione dei fissaggi: come previsto dalle norme FIA il sedile deve essere fissato alle staffe per mezzo di almeno quattro bulloni M8 cl 8.8. Di seguito potete trovare gli interassi dei fori di fissaggio dei nostri sedili espressi in mm.

\* I pesi sono riferiti al sedile completo (10% di tolleranza).

\*\* Relativo agli attacchi inferiori della guida scorrevole.

**TIPO W:** interasse laterale 289 mm **TIPO Y:** interassi inferiori 345x270 mm

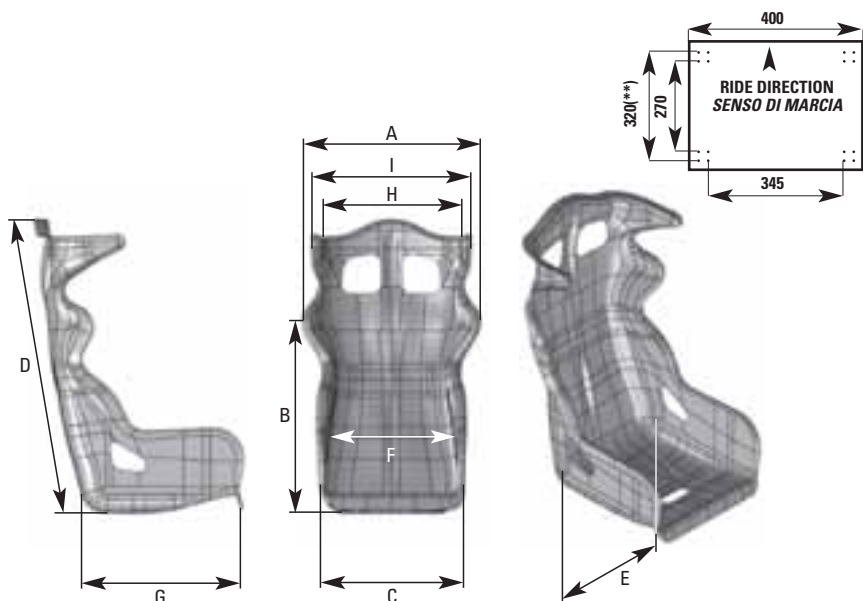







#### LEGEND

- A external max width at shoulders
  - B seat bottom to mid shoulders
  - C external max width of side bolsters
  - D total height of seat back
  - E seat bottom max **external** width
  - F seat **inner** width (belt holes area)
  - G bottom length
  - H internal width between side head protections
  - I external width between side head protections
- W = side fixing Y = bottom fixing**

#### LEGENDA

- A larghezza massima esterna spalle
  - B da fondo sedile a mezzera spalle
  - C larghezza massima esterna zona gambe
  - D altezza massima dal fondo
  - E larghezza max **esterna** (zona attacchi laterali)
  - F larghezza **interna** sedile (zona plastica cintura)
  - G lunghezza seduta
  - H larghezza **interna** poggiatesta
  - I larghezza **esterna** poggiatesta
- W = attacchi laterali Y = attacchi inferiori**

Homologation Omologazione	Shell Scocca	AIRTEX® material/tessuto	Cushions split/leg Cuscino poggiatesta	Measure in mm / Misure in mm									Harness slot Fori	Weight* (kg) Peso * (kg)	Fixing Fissaggio	
				A	B	C	D	E	F	G	H	I				
<b>HTE ONE E HA/761E</b>																
FIA 8862/2009	CARBON	✓	✓	625	620	490	890	380	365	480	365	500	5	9.9	W	
<b>PROTOTIPO HA/745</b>																
FIA 8855/1999	CARBON	✓	✓	530	520	440	790	385	380	480	360	450	5	6,1	W	
<b>HTE HA/772</b>																
FIA 8855/1999	FIBERGLASS	✓	✓	580	570	515	880	420	390	490	315	510	5	9.4	W	
<b>HTE 400 HA/780</b>																
FIA 8855/1999	FIBERGLASS	✓	✓	560	570	515	880	420	390	490	310	420	5	10.2	W	
<b>HTE XL HA/771</b>																
FIA 8855/1999	FIBERGLASS	✓	✓	560	610	530	920	440	415	550	305	485	5	10.5	W	
<b>HTE CARBON HA/768</b>																
FIA 8855/1999	CARBON	✓	✓	545	560	465	880	390	370	470	330	490	5	6.6	W	
<b>HTE CARBON XL HA/779</b>																
FIA 8855/1999	CARBON	✓	✓	560	580	485	890	425	390	490	330	490	5	6.8	W	

Homologation Omologazione	Shell Scocca	AIRTEX® material/tessuto	Cushions split/leg Cuscino poggiatesta sdoppiato	Measure in mm / Misure in mm										Harness slot Fori	Weight* (kg) Peso* (kg)	Fixing Fissaggio		
				A	B	C	D	E	F	G	H	I						
WRC HA/773																		
FIA 8855/1999	FIBERGLASS	✓	✓	620	600	510	890	410	390	480	/	/	5	8.8	W			
WRC CARBON HA/769																		
FIA 8855/1999	CARBON	✓	✓	590	600	495	890	400	365	490	/	/	5	5.6	W			
WRC XL HA/778																		
FIA 8855/1999	FIBERGLASS	✓	✓	665	600	520	920	430	415	480	/	/	5	10.7	W			
ARS HA/774																		
FIA 8855/1999	FIBERGLASS	✓		590	600	500	910	395	370	490	/	/	5	8.9	W			
ARS CARBON HA/770																		
FIA 8855/1999	CARBON	✓		585	600	480	890	380	360	490	/	/	5	5.8	W			
RS-PT. 2 HA/762																		
FIA 8855/1999	FIBERGLASS			565	560	510	880	420	395	480	340	510	5	10.4	W			
CHAMP HA/766																		
FIA 8855/1999	FIBERGLASS			590	575	520	890	400	360	480	/	/	5	8.8	W			
TRS PLUS HA/744																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			585	640	510	890	410	390	470	/	/	5	10.3	W Y			
TRS HA/741																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			585	640	510	890	410	390	470	/	/	5	10.3	W Y			
TRS XL HA/781																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			625	680	540	950	450	415	520	/	/	5	12.3	W			
TRS SKY HA/760																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			585	640	510	890	410	390	470	/	/	5	10.8	W Y			
TRS SKY XL HA/782																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			625	680	540	950	450	415	520	/	/	5	12.9	W			
TRS LEGEND HA/775 (PAG. 182)																		
FIA 8855/1999	TUBULAR STEEL ACCIAIO			585	640	510	890	410	390	470	/	/	5	10.8	W Y			